


Esempio pilota:  
**NATconCLI**

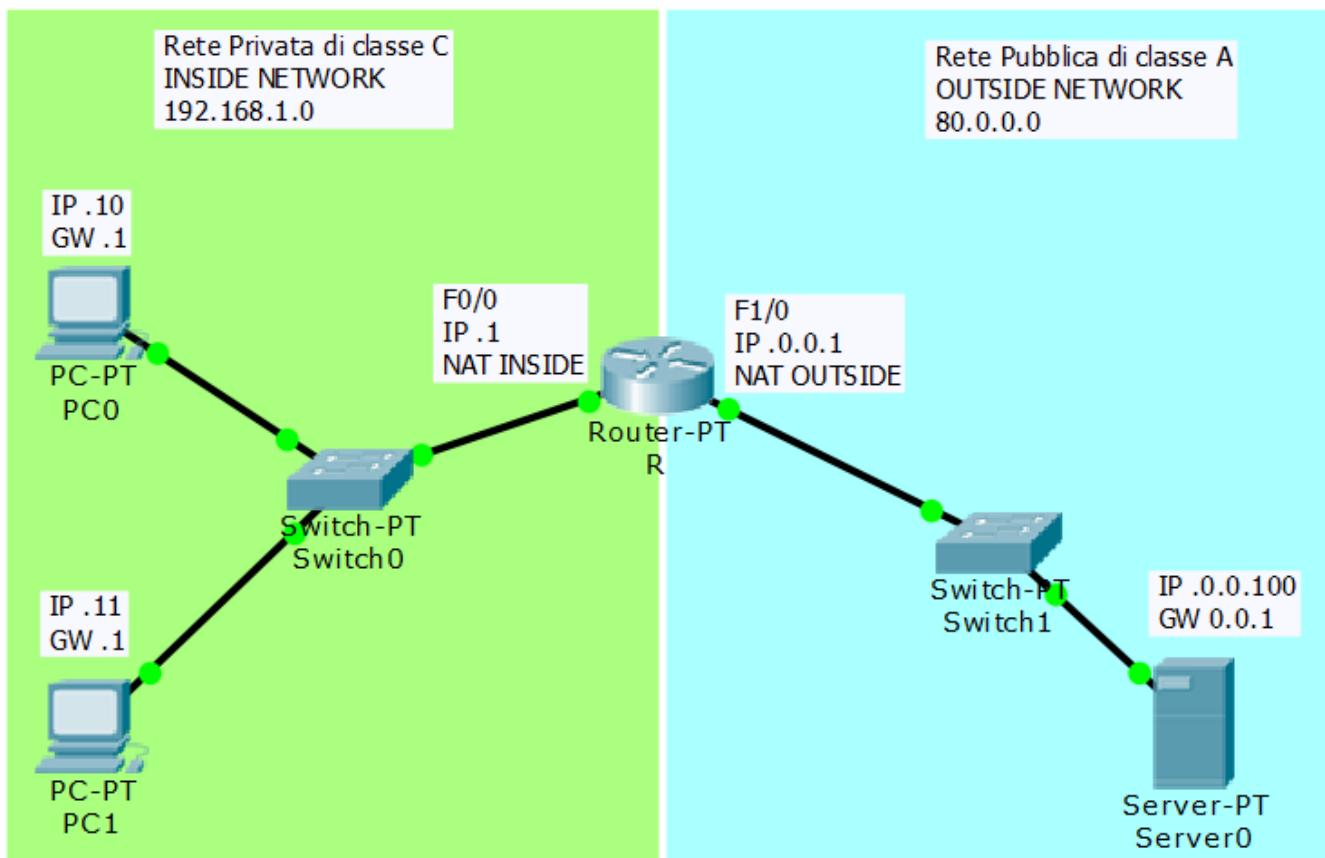

### Configurazione da CLI del router R

```
R> enable
R# config terminal
```

*...Imposto la F0/0 come INSIDE ...*

```
R(config)# interface fastethernet 0/0
R(config-if)# ip nat inside
R(config-if)# exit
```

*...Imposto la F1/0 come OUTSIDE ...*

```
R(config)# interface fastethernet 1/0
R(config-if)# ip nat outside
R(config-if)# exit
```

*...Definisco la lista di accesso ...*

```
R(config)# access-list 1 permit 192.168.1.0 0.0.0.255
```

*...Imposto il NAT many-to-one ...*

```
R(config)# ip nat inside source list 1 interface fastethernet 1/0 overload
```