


Esempio pilota:  
**PortForwardingConCLI**

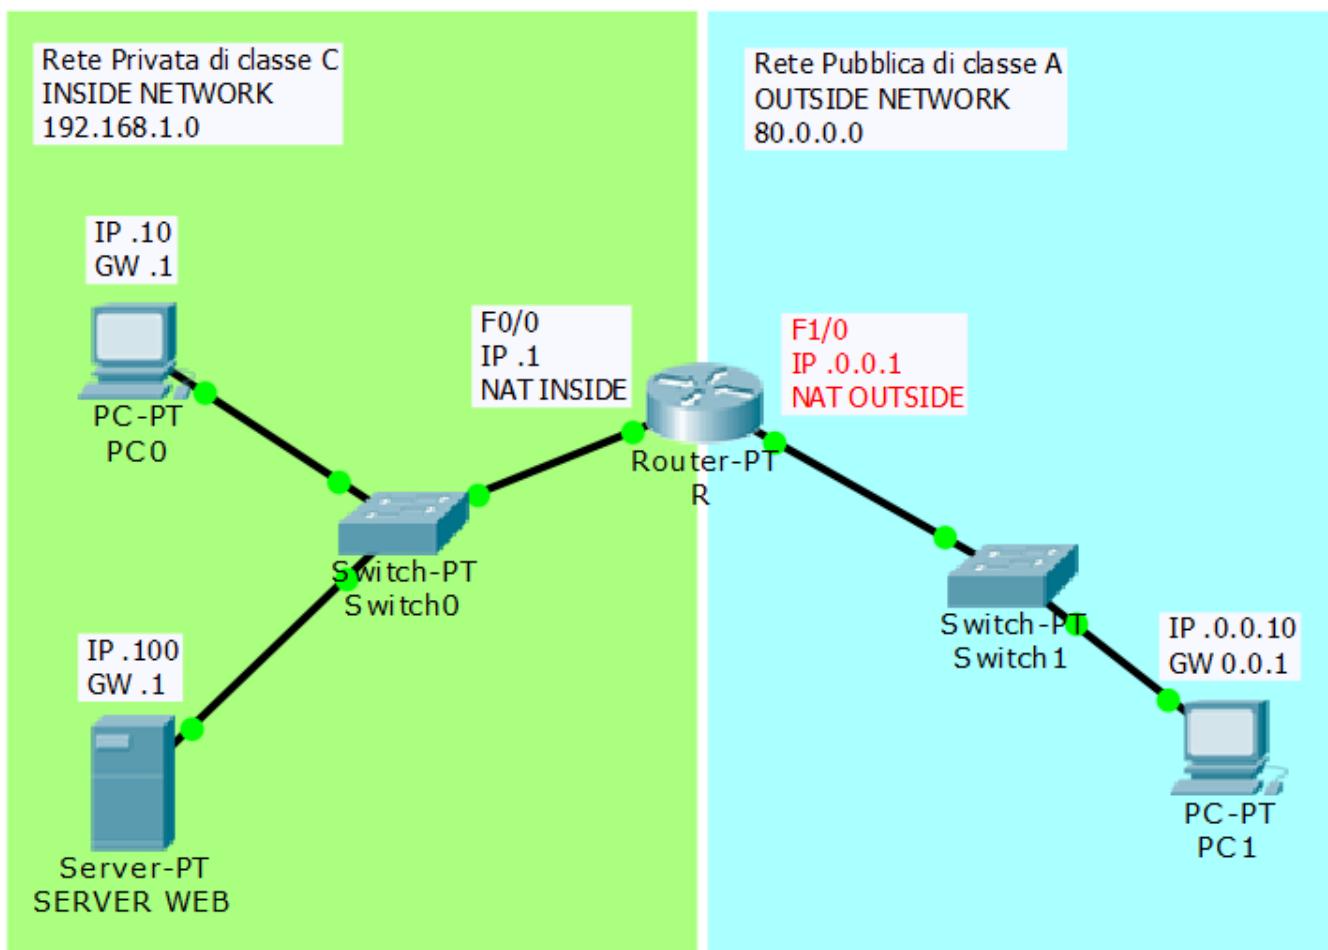

### Configurazione da CLI del router R

```
R> enable
R# config terminal
```

*...Imposto la F0/0 come INSIDE ...*

```
R(config)# interface fastethernet 0/0
R(config-if)# ip nat inside
R(config-if)# exit
```

*...Imposto la F1/0 come OUTSIDE ...*

```
R(config)# interface fastethernet 1/0
R(config-if)# ip nat outside
R(config-if)# exit
```

*...Imposto il Port Forwarding ...*

```
R(config)# ip nat inside source static tcp 192.168.1.100 80 80.0.0.1 80
```