


ESEMPIO su "Utilizzo della CLI dei Router Cisco"

Configurare un Router tramite CLI per connettere direttamente due reti private di classe C

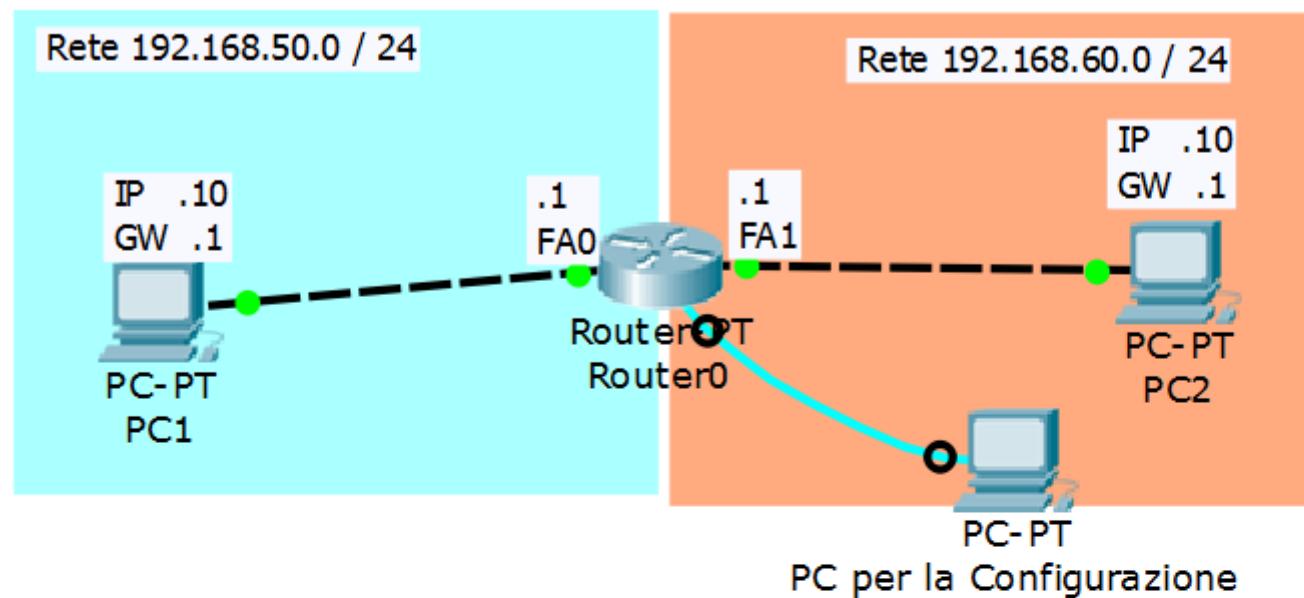

```

Router> enable
Router# config terminal
Router(config)#  interface fastethernet 0/0
Router(config-if)# ip address 192.168.50.1 255.255.255.0
Router(config-if)# no shutdown
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
Router(config-if)# exit
Router(config)#  interface fastethernet 1/0
Router(config-if)# ip address 192.168.60.1 255.255.255.0
Router(config-if)# no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet1/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/0, changed state to up
Router(config-if)# exit
Router(config)#  exit
Router#

```